








S6505



## S6505

COMPOSICIÓN	PESO	ESPESOR	RESISTENCIA AL FUEGO	FACTOR DE APERTURA	ANCHO	MANTENIMIENTO
						
42% FIBRA DE VÍDRIO 58% PV	650 gr./m <sup>2</sup> ± 10%	0,75 mm. ± 5%	IGNÍFUGO M1 (F) NFP 92503 B1 (DE) DIN 4102-1 B5 (BG) 476 Pt 6-7 Class 0 CLASE 1 (SP) EN 13773 FR (US) NFPA 701	5%	320 cms.	LIMPIEZA CON PAÑO HÚMEDO



# S6505



1




2



3



14

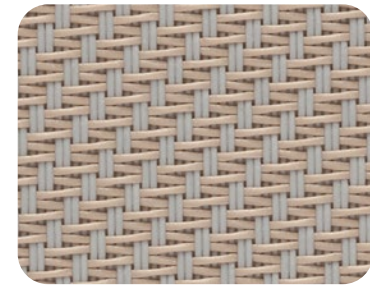

4



15



16




18



17



5

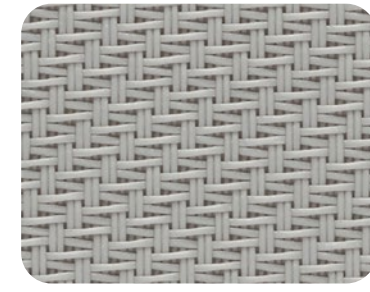

8



25



9



11

